

SPECIFICATION

SERIES 25/25L

PROBE P25 / 25L	MECHANICAL	
	Full travel:	6.3mm
	Recommended working travel:	4.26mm
	SPRING FORCE	
	Preload:	0.2N 0.5N 0.5N 0.5N 0.5N
	@ Working travel:	0.6N 1.0N 1.8N 3.0N 4.5N
	ORDER PART NO.	-00 -0 -1 -2 -3
	ELECTRICAL	
	Max current:	3.0 amps
	Terminal resistance:	<25m ohms
	Recommended hole size:	1.7mm


"-00" "-0" "-3" only. Some tip styles.
High temp. version -40°C to +250°C Heads available
A/B/C/H, others on request. -1 spring only.

TIP STYLES

P25-A/A1 STEEL / BeCu	P25-B STEEL / BeCu	P25-BST STEEL	P25-BT80ST STEEL	P25-C/C0/C3 STEEL / BeCu
P25-C1/C2/C4/C5 STEEL / BeCu	P25-C7 STEEL / BeCu	P25-C6 BeCu	P25-C.INS BeCu	P25-C1.INS BeCu
P25-CHP BeCu	P25-D BeCu	P25-D1 STEEL / BeCu	P25-E/E1 STEEL / BeCu	P25-F STEEL / BeCu
P25-FN/FN1 TOOL STEEL / STEEL	P25-H/H1/H3 STEEL / BeCu	P25-H0 STEEL / BeCu	P25-I STEEL / BeCu	P25-K STEEL
P25-L STEEL	P25-M1 STEEL	P25-3NST STEEL	P25-P BeCu	P25-Q/Q1 STEEL / BeCu
P25-Q5 STEEL	P25-Q6 BeCu	P25-S STEEL / BeCu	P25-SU STEEL / BeCu	P25-T STEEL
P25-TSU STEEL / BeCu	P25-U BeCu	P25-V BeCu	P25-XI BeCu	P25-Z STEEL / BeCu

RECEPTACLES


RECEPTACLES

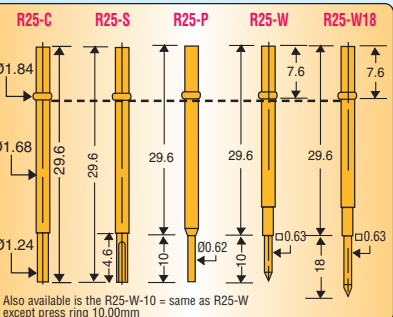

Note: Receptacles: Various special types available, please request data

NEW RECEPTACLES

RECEPTACLES

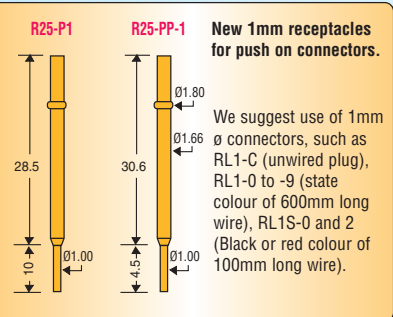

Note: R25-S-12.65 has compression ring 12.65 from top

P25L Tip Styles available refer to drawings above BST ($\phi 0.62$), BT80, B, C, C1, C2, C5, Q1.
The P25L Series offers a 2mm longer tip.

PROBE ORDER CODE
P25 - B - 0
Series Tip Style Spring Force

Note: Tip Material shown Black - Standard Stock Item Blue - Optional On Request Purple = Minimum order quantity