


**PIP SERIES**

**Note:** Interface pins are available with either 'Barbed' or 'Knurled' fitting design. Please refer to the list below.

**INTERFACE PINS**



Model	PIP-G1	PIP-Z1	PIP-ZL
<b>Dimensions</b>			
A	17.78 mm	17.78 mm	23.5 mm
B	5.08 mm	5.08 mm	5.08 mm
C	□ 0.64 mm	□ 0.64 mm	□ 0.64 mm
D	1.35 mm	1.47 mm	1.47 mm
E	1.83 mm	1.83 mm	1.83 mm
F		1.09 mm	1.09 mm
<b>Material</b>	Gold plated brass		
<b>Mounting Hole Ø</b>	1.45 mm	1.45 mm	1.45 mm
<b>For</b>	GenRad	Zehntel/Teradyne	Special Interfaces





PART NO.	FITTING TYPE
PIP-G1	KNURLED
PIP-G1-B	BARBED
PIP-G3	BARBED
PIP-G4	KNURLED
PIP-GP1	BARBED
PIP-Z1	KNURLED
PIP-Z1-B	BARBED
PIP-ZL	BARBED

**POWER PINS**

**GENRAD & GENERAL PURPOSE POWER PINS**

**GENERAL PURPOSE PINS**






**AGILENT/HP 3070 FIXTURE PERSONALITY PIN PHP-70**



**Note:** Special Pins made on request / Factron datasheet available on request = PIP-F1

Black Plastic body with Gold Plated Tail

**TEST SYSTEM RECEIVER/INTERFACE PROBES**

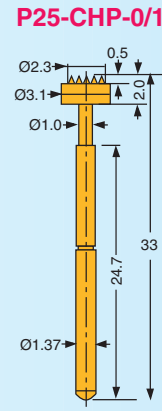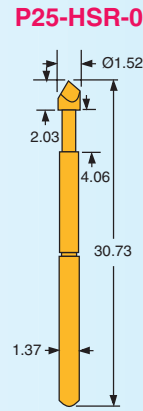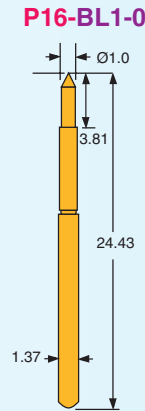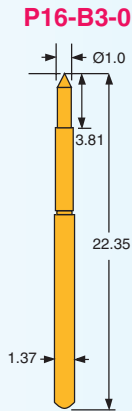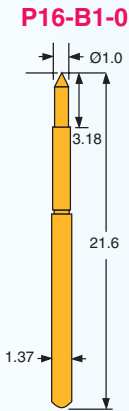

**GENRAD AND ROHDE & SCHWARZ**  
 P16-B1-0 Straight barrel or P16-B1-0-P Curved barrel (Pylon replacement)  
 Fits receptacles R16-S or W

**OLIVETTI/TECHNOST/CIRCUIT LINE**  
 Bare board testers  
 P25-H/C/F  
 See P25 Series, page 3 for specification

**BSL FLYING PROBER ORIGINAL DESIGN**  
 Replacement probe available  
 Part No. = P30-BSL

**SCHLUMBERGER/FACTRON**  
 P25-HSR-0 fits receptacle R25-W or S

**AGILENT/HEWLETT PACKARD 3070**  
 P25-CHP-0/1  
 See P25 Series for specification  
 Spring force -0 = 1.0N or -1 = 1.8N  
 Fit R25 receptacles

**GENRAD/ROHDE & SCHWARZ**  
 Long version P16-B3-0

**TERADYNE/ZEHNTTEL/INNOVATE**  
 P25-H-0  
 See P25 Series, page 3 for specification

**Note:** Purple = Minimum order quantity